



IVR-L 100/40 Sc

IVR-L 100/40 mobile liquid and swarf vacuum, ideal for a wide range of applications. Reliably and safely vacuums oils, coolant emulsions and fine and coarse (metal) shavings.



1 Simple and safe emptying without removal of drive head

- Set-down trolley and rolling container for ergonomic emptying.

3 Low-noise operation

- Quiet operation thanks to sound-damped drive unit.

2 Convenient, manual and safe draining of liquids

- Drain hose on the container for safe draining of oils and coolants.
- Filling level indicator on the drain hose and machine to prevent overfilling.



IVR-L 100/40 Sc

- Compact construction style that takes up very little floor space
- Sound reduction

Technical data

Order no.	9.989-401.0	
EAN code	4054278695167	
Current type	Ph / V / Hz	3 / 400 / 50
Air flow	l/s / m³/h	137.5 / 495
Vacuum	mbar / kPa	140 / 14
Connection nominal diameter	ID 70	
Accessory nominal diameter	ID 70 / ID 50	

IVR-L 100/40 SC

9.989-401.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
Surface filter								
Surface filter PE L 0.45 m ²	1	9.980-180.0						<input type="checkbox"/>
Accessories adapter								
Adapter accessories DN 50 to DN 51	2	9.989-603.0		DN 50			Allows use of IV 60 and IV 100 accessories with industrial vacuum accessories.	<input type="checkbox"/>
Adapter accessories DN 51 to DN 50	3	9.989-601.0		DN 50			Allows use of industrial vacuum accessories with IV 60 and IV 100 accessories.	<input type="checkbox"/>
Adapter accessories DN50 to DN61	4	9.989-602.0		DN 50			Allows use of IV 60 and IV 100 accessories with industrial vacuum accessories.	<input type="checkbox"/>
Adapter accessories DN 61 to DN 50	5	9.989-604.0		DN 50			Allows use of industrial vacuum accessories with IV 60 and IV 100 accessories.	<input type="checkbox"/>
Reducers/expanders								
Reduction DN70 to DN50	6	9.977-772.0		DN 70			Electroconductive, steel.	<input type="checkbox"/>
Reduction DN70 to DN40	7	9.989-690.0		DN 70				<input type="checkbox"/>
Reduction DN50 to DN40	8	9.981-231.0		DN 50			Electroconductive. Steel.	<input type="checkbox"/>
Stainless steel reducer DN 70 to DN 50	9	9.989-712.0		DN 70				<input type="checkbox"/>
Stainless steel reducer DN 70 to DN 40	10	9.989-713.0		DN 70				<input type="checkbox"/>
Expander								
Expansion DN50 to DN70	11	9.981-921.0		DN 50			Electroconductive. Steel.	<input type="checkbox"/>
Distributor								
Y-piece fitting DN70 to DN50	12	9.989-611.0		DN 70				<input type="checkbox"/>
Hose installation set								
Hose installation kit DN50	13	9.989-628.0		DN 50			Comprising 2 hose ends, 2 hose clamps and 2 hose sleeves.	<input type="checkbox"/>
Hose installation kit DN70	14	9.989-629.0		DN 70				<input type="checkbox"/>
PU								
Hose PU DN50 3 m	15	9.989-619.0		DN 50			Robust, oil-resistant design. Suitable for abrasive suction media, liquids and dust. Temperature-resistant up to max. 80 °C.	<input type="checkbox"/>
Hose PU DN50 5 m	16	9.989-620.0		DN 50				<input type="checkbox"/>
PU hose DN50 15 m without connectors	17	9.989-638.0		DN 50			Hose package without hose ends. Length: 15 m.	<input type="checkbox"/>
Hose PU DN70 3 m	18	9.989-644.0		DN 70			Robust, oil-resistant design. Suitable for abrasive suction media, liquids and dust. Temperature-resistant up to max. 80 °C.	<input type="checkbox"/>
Hose PU DN70 5 m	19	9.989-645.0		DN 70				<input type="checkbox"/>
PU hose DN70 15 m without connectors	20	9.989-639.0		DN 70			Hose package without hose ends. Length: 15 m.	<input type="checkbox"/>
ME-PU								
Hose ME-PU DN50 3 m	21	9.989-623.0		DN 50			Very robust, oil-resistant design. Suitable for highly abrasive suction media with liquids. Temperature-resistant up to max. 110 °C.	<input type="checkbox"/>
Hose ME-PU DN50 5 m	22	9.989-625.0		DN 50				<input type="checkbox"/>
ME-PU hose DN50 15 m without connectors	23	9.989-641.0		DN 50				<input type="checkbox"/>
Hose ME-PU DN70 3 m	24	9.989-646.0		DN 70				<input type="checkbox"/>
Hose ME-PU DN70 5 m	25	9.989-648.0		DN 70				<input type="checkbox"/>
ME-PU hose DN70 15 m without connectors	26	9.989-642.0		DN 70			Hose package without hose ends. Length: 15 m.	<input type="checkbox"/>
Handles								
Handle DN 50	27	9.977-678.0		DN 50				<input type="checkbox"/>
Handle DN 70	28	9.977-677.0		DN 70				<input type="checkbox"/>
Stainless steel handle NW50	29	9.988-111.0		DN 50				<input type="checkbox"/>

Available accessories.

IVR-L 100/40 SC

9.989-401.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
Suction tubes								
Suction tube 850 mm DN 40	30	9.977-531.0		DN 50				<input type="checkbox"/>
Suction tube 850 mm DN 70	31	9.981-910.0		DN 70				<input type="checkbox"/>
Aluminium suction tube 1500 mm NW40	32	9.989-038.0		DN 40			As an extension for convenient overhead cleaning.	<input type="checkbox"/>
Aluminium suction tube 1500 mm NW50	33	9.989-035.0		DN 50				<input type="checkbox"/>
Stainless steel suction tube 850 mm NW50	34	9.988-114.0		DN 50				<input type="checkbox"/>
Carbon suction tube 1500 mm DN50	35	9.989-553.0		DN 50			As an extension for convenient overhead cleaning.	<input type="checkbox"/>
Standard nozzles								
Standard PVC nozzle DN50	36	9.989-673.0		DN 50				<input type="checkbox"/>
Standard PVC nozzle DN70	37	9.989-676.0		DN 70				<input type="checkbox"/>
Standard nozzle silicone DN40	38	9.988-401.0		DN 40			Electroconductive.	<input type="checkbox"/>
Standard nozzle silicone DN50	39	9.988-402.0		DN 50				<input type="checkbox"/>
Standard silicone nozzle DN70	40	9.989-672.0		DN 70				<input type="checkbox"/>
Standard nozzle cuttable rubber DN50	41	9.989-675.0		DN 50				<input type="checkbox"/>
Standard aluminium nozzle DN50	42	9.980-749.0		DN 50			Electroconductive.	<input type="checkbox"/>
Standard aluminium nozzle DN70	43	9.989-663.0		DN 70				<input type="checkbox"/>
Flexible standard nozzles								
Standard nozzle flexible PVC DN50	44	9.981-421.0		DN 50			Electroconductive.	<input type="checkbox"/>
Standard nozzle flexible PVC DN70	45	9.981-422.0		DN 70				<input type="checkbox"/>
Standard nozzle, flexible, angled 90° PP DN50	46	9.981-430.0		DN 50				<input type="checkbox"/>
Floor nozzles								
Aluminium floor nozzle 200 mm DN50	47	9.981-426.0		DN 50			Not electroconductive.	<input type="checkbox"/>
Aluminium floor nozzle 370 mm DN50	48	9.989-664.0		DN 50				<input type="checkbox"/>
Aluminium floor nozzle, el, 370 mm, DN50	49	9.987-612.0		DN 50			Electroconductive.	<input type="checkbox"/>
Aluminium floor nozzle 500 mm DN50	50	9.989-684.0		DN 50			Not electroconductive.	<input type="checkbox"/>
Aluminium floor nozzle, el, 500 mm, DN50	51	9.981-925.0		DN 50			Electroconductive.	<input type="checkbox"/>
Stainless steel floor nozzle el 370 mm DN50	52	9.988-115.0		DN 50				<input type="checkbox"/>
Floor nozzle rubber strip oil-resistant, 220 mm	53	9.981-923.0					For floor nozzle with 220 mm width.	<input type="checkbox"/>
Floor nozzle rubber strip 370 mm	54	9.981-914.0					For floor nozzle with 370 mm width.	<input type="checkbox"/>
Floor nozzle rubber strip 500 mm	55	9.981-915.0					For floor nozzle with 500 mm width.	<input type="checkbox"/>
Floor nozzle brush strip el, 370 mm	56	9.984-939.0					For floor nozzle with 370 mm width.	<input type="checkbox"/>
Floor nozzle brush strip 500 mm	57	9.980-764.0					For floor nozzle with 500 mm width.	<input type="checkbox"/>
Crevice nozzles								
Crevice nozzle PP 15 mm x 145 mm DN50	58	9.988-117.0		DN 50				<input type="checkbox"/>

Available accessories.

IVR-L 100/40 SC

9.989-401.0

KÄRCHER




		Order no.	Quantity	ID	Length / width	Price	Description	
Crevice nozzle PU 22 mm x 175 mm DN50	59	9.981-482.0		DN 50			Electroconductive.	<input type="checkbox"/>
Crevice nozzle 18 mm x 120 mm DN50	60	9.981-442.0		DN 50				<input type="checkbox"/>
Crevice nozzle 25 mm x 120 mm DN50	61	9.981-465.0		DN 50				<input type="checkbox"/>
Crevice nozzle 28 mm x 120 mm DN70	62	9.981-444.0		DN 70				<input type="checkbox"/>
Stainless steel crevice nozzle 22 mm x 220 mm DN50	63	9.988-123.0		DN 50				<input type="checkbox"/>
Flexible crevice nozzles								
Flexible crevice nozzle silicone 65 mm DN50	64	9.988-403.0		DN 50			Electroconductive.	<input type="checkbox"/>
Flexible crevice nozzle 11 mm x 58 mm DN40	65	9.989-681.0		DN 40				<input type="checkbox"/>
Flexible crevice nozzle 12 mm x 45 mm DN50	66	9.981-424.0		DN 50			Electroconductive.	<input type="checkbox"/>
Flexible crevice nozzle 20 mm x 45 mm DN50	67	9.981-425.0		DN 50				<input type="checkbox"/>
Surface nozzles								
Silicone surface nozzle 120 mm DN50	68	9.988-119.0		DN 50				<input type="checkbox"/>
Aluminium surface nozzle 150 mm DN50	69	9.989-665.0		DN 50				<input type="checkbox"/>
Liquid nozzles								
Liquid nozzle 900 mm DN50	70	9.981-427.0		DN 50			Suitable for vacuuming large volumes of liquids from containers and trays.	<input type="checkbox"/>
Borehole nozzles								
Blind hole nozzle DN40	71	9.989-671.0		DN 40			For cleaning blind holes.	<input type="checkbox"/>
Blind hose nozzle angled 60° DN40	72	9.989-669.0		DN 40				<input type="checkbox"/>
Blind hose nozzle angled 90° DN40	73	9.989-667.0		DN 40				<input type="checkbox"/>
Blind hose nozzle angled 90° 200 mm extension DN40	74	9.989-670.0		DN 40				<input type="checkbox"/>
Standard brushes								
Standard brush 40 mm DN50	75	9.981-432.0		DN 50			Flat brush nozzle DN 50.	<input type="checkbox"/>
End brushes								
End brush Ø 82 mm DN50	76	9.989-608.0		DN 50				<input type="checkbox"/>
Surface brushes								
Surface brush 300 mm DN50	77	9.981-912.0		DN 50				<input type="checkbox"/>
Pre-separator								
Pre-separator Tc Op liquids 125 l DN70	78	9.989-686.0		DN 70				<input type="checkbox"/>
Pre-separator lid								
Pre-separator cover Op liquids ø 517 mm DN70	79	9.981-666.0		DN 70			For containers with 517 mm diameter.	<input type="checkbox"/>
Pre-separator cover Op liquids ø 575 mm DN70	80	9.981-662.0		DN 70			For 200 litre standard drum (9.989-685.0).	<input type="checkbox"/>
Pre-separator cover solid materials ø 517 mm DN70	81	9.981-665.0		DN 70			For containers with 517 mm diameter.	<input type="checkbox"/>

Available accessories.

IVR-L 100/40 SC

9.989-401.0

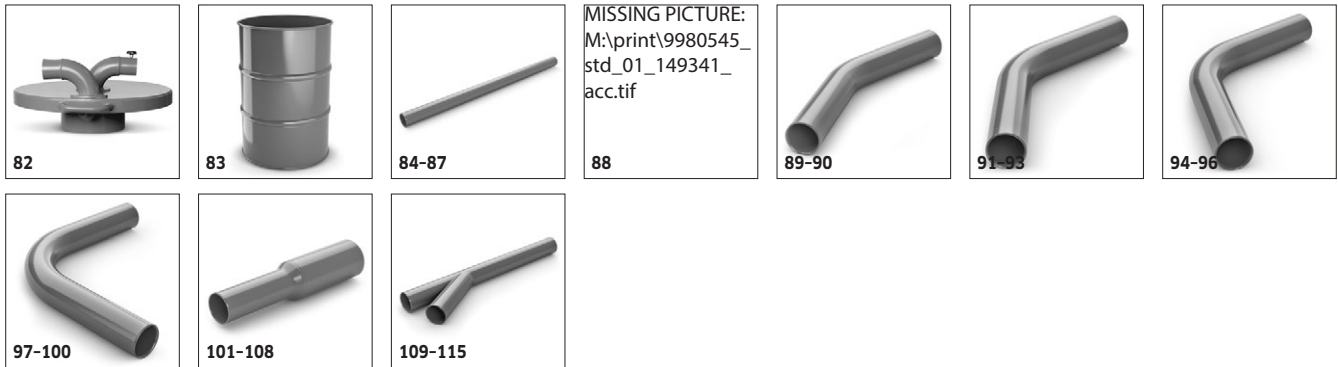

	Order no.	Quantity	ID	Length / width	Price	Description	
Pre-separator cover solid materials ø 575 mm DN70	82	9.981-661.0	DN 70			For 200 litre standard drum (9.989-685.0).	<input type="checkbox"/>
Pre-separator drum 200 l	83	9.989-685.0				Standard drum. Standardised acc. to ISO 15750-2.	<input type="checkbox"/>
IV pipelines							
IV pipe Ø 42.4 mm	84	9.980-451.0				Steel, wall thickness = 2 mm, bulk stock.	<input type="checkbox"/>
IV pipe Ø 60 mm	85	9.980-452.0					<input type="checkbox"/>
IV pipe Ø 75 mm	86	9.980-453.0					<input type="checkbox"/>
IV pipe Ø 100 mm	87	9.980-455.0					<input type="checkbox"/>
IV pipe elbow 30° Ø 60.3 mm	88	9.980-545.0				Steel, wall thickness = 3,6 mm.	<input type="checkbox"/>
IV pipe elbow 30° Ø 76.1 mm	89	9.980-546.0					<input type="checkbox"/>
IV pipe elbow 30° Ø 101.6 mm	90	9.980-547.0				Steel, wall thickness = 4 mm.	<input type="checkbox"/>
IV pipe elbow 45° Ø 60.3 mm	91	9.980-548.0				Steel, wall thickness = 3,6 mm	<input type="checkbox"/>
IV pipe elbow 45° Ø 76.1 mm	92	9.980-549.0				Steel, wall thickness = 3,6 mm.	<input type="checkbox"/>
IV pipe elbow 45° Ø 101.6 mm	93	9.980-550.0				Steel, wall thickness = 4 mm.	<input type="checkbox"/>
IV pipe elbow 60° Ø 60.3 mm	94	9.980-551.0				Steel, wall thickness = 3,6 mm.	<input type="checkbox"/>
IV pipe elbow 60° Ø 76.1 mm	95	9.980-552.0					<input type="checkbox"/>
IV pipe elbow 60° Ø 60.3 mm	96	9.980-553.0				Steel, wall thickness = 4 mm.	<input type="checkbox"/>
IV pipe elbow 90° Ø 42.4 mm	97	9.985-373.0				Steel, wall thickness = 2,6 mm.	<input type="checkbox"/>
IV pipe elbow 90° Ø 60.3 mm	98	9.980-554.0				Steel, wall thickness = 3,6 mm.	<input type="checkbox"/>
IV pipe elbow 90° Ø 76.1 mm	99	9.980-555.0					<input type="checkbox"/>
IV pipe elbow 90° Ø 101.6 mm	100	9.980-556.0				Steel, wall thickness = 4 mm.	<input type="checkbox"/>
IV pipe reduction Ø 120 mm to 100 mm	101	9.981-335.0				Steel, wall thickness = 2 mm	<input type="checkbox"/>
IV pipe reduction Ø 120 mm to 60 mm	102	9.981-337.0					<input type="checkbox"/>
IV pipe reduction Ø 100 mm to 75 mm	103	9.981-334.0					<input type="checkbox"/>
IV pipe reduction Ø 100 mm to 60 mm	104	9.981-336.0					<input type="checkbox"/>
IV pipe reduction Ø 80 mm to 75 mm	105	9.980-494.0				Steel, wall thickness = 2 mm.	<input type="checkbox"/>
IV pipe reduction Ø 80 mm to 60 mm	106	9.980-493.0					<input type="checkbox"/>
IV pipe reduction Ø 75 mm to 60 mm	107	9.981-333.0					<input type="checkbox"/>
IV pipe reduction Ø 60 mm to 42.2 mm	108	9.981-228.0					<input type="checkbox"/>
IV pipe manifold 30° branch Ø 120 mm to 100 mm	109	9.981-129.0				Steel, wall thickness = 2 mm, length = 550 mm.	<input type="checkbox"/>
IV pipe manifold 30° branch Ø 120 mm to 75 mm	110	9.981-127.0				Steel, wall thickness = 2 mm, length = 600 mm.	<input type="checkbox"/>
IV pipe manifold 30° branch Ø 100 mm to 75 mm	111	9.981-126.0				Steel, wall thickness = 2 mm, length = 700 mm.	<input type="checkbox"/>
IV pipe manifold 30° branch Ø 100 mm to 60 mm	112	9.981-124.0				Steel, wall thickness = 2 mm, length = 600 mm.	<input type="checkbox"/>
IV pipe manifold 30° branch Ø 75 mm to 60 mm	113	9.981-123.0					<input type="checkbox"/>
IV pipe manifold 30° branch Ø 60 mm to 42.4 mm	114	9.981-258.0					<input type="checkbox"/>
IV pipe manifold 30° branch Ø 120 mm	115	9.981-130.0					<input type="checkbox"/>

Available accessories.

IVR-L 100/40 SC 9.989-401.0

KÄRCHER



		Order no.	Quantity	ID	Length / width	Price	Description	
IV pipe manifold 30° branch Ø 100 mm	116	9.981-128.0					Steel, wall thickness = 2 mm, length = 700 mm.	<input type="checkbox"/>
IV pipe manifold 30° branch Ø 75 mm	117	9.981-125.0					Steel, wall thickness = 2 mm, length = 600 mm.	<input type="checkbox"/>
IV pipe manifold 30° branch Ø 60 mm	118	9.981-122.0						<input type="checkbox"/>
IV pipe manifold 30° branch Ø 42.4 mm	119	9.981-259.0						<input type="checkbox"/>
IV pipe manifold Y-piece Ø 120 mm to 100 mm	120	9.981-135.0					Steel, wall thickness = 2 mm, length = 500 mm.	<input type="checkbox"/>
IV pipe manifold Y-piece Ø 100 mm to 75 mm	121	9.981-134.0					Steel, wall thickness = 2 mm, length = 440 mm.	<input type="checkbox"/>
IV pipe manifold Y-piece Ø 80 mm to 60 mm	122	9.981-133.0					Steel, wall thickness = 2 mm, length = 380 mm.	<input type="checkbox"/>
IV pipe manifold Y-piece Ø 75 mm to 60 mm	123	9.981-132.0						<input type="checkbox"/>
IV pipe manifold Y-piece Ø 60 mm to 42 mm	124	9.981-131.0					Steel, wall thickness = 2 mm, length = 327 mm.	<input type="checkbox"/>
IV pipe connectors/fastenings								
IV pipe coupling Ø 42.4 mm	125	9.980-445.0					Steel; 3 clamping screws.	<input type="checkbox"/>
IV pipe coupling Ø 60 mm	126	9.980-446.0						<input type="checkbox"/>
IV pipe coupling Ø 75 mm	127	9.980-447.0						<input type="checkbox"/>
IV pipe coupling Ø 100 mm	128	9.980-449.0						<input type="checkbox"/>
IV pipe clamp Ø 41 - 44 mm	129	9.980-463.0					Fastening screw M8.	<input type="checkbox"/>
IV pipe clamp Ø 60 - 63 mm	130	9.980-464.0						<input type="checkbox"/>
IV pipe clamp Ø 74 - 78 mm	131	9.980-465.0					Fastening screw M10.	<input type="checkbox"/>
IV pipe clamp Ø 99 - 103 mm	132	9.980-466.0						<input type="checkbox"/>
IV pipe clamp Ø 116 - 120 mm	133	9.980-467.0						<input type="checkbox"/>
IV pipe floor support	134	9.981-118.0					H = 2200-3500 mm; for pipe collar with M10 thread.	<input type="checkbox"/>
IV pipe on hose adapter, female Ø 42.2 to DN40	135	9.981-256.0		DN 40			Steel, wall thickness = 2 mm.	<input type="checkbox"/>
IV pipe on hose adapter, female Ø 60 to DN50	136	9.981-166.0		DN 50				<input type="checkbox"/>
IV pipe on hose adapter, female Ø 75 to DN70	137	9.981-170.0		DN 70				<input type="checkbox"/>
IV pipe on hose adapter, male Ø 42.2 to DN40	138	9.981-257.0		DN 40				<input type="checkbox"/>
IV pipe on hose adapter, male Ø 60 to DN50	139	9.981-332.0		DN 50				<input type="checkbox"/>
IV pipe on hose adapter, male Ø 75 to DN70	140	9.981-195.0		DN 70				<input type="checkbox"/>
Suction point accessories								
Suction point standard PVC nozzle DN40	141	9.981-454.0		DN 40			For manual suction point, suitable for jet cookers.	<input type="checkbox"/>
Suction point standard PVC nozzle DN50	142	9.981-455.0		DN 50				<input type="checkbox"/>
Suction point, standard brush DN40	143	9.981-436.0		DN 40			Steel, wall thickness = 2,6 mm.	<input type="checkbox"/>
Suction point nozzle holder	144	9.981-520.0					For mounting to a wall. Suitable for DN 40, 50 and 70. Incl. limit switch for vacuum cleaner control.	<input type="checkbox"/>
Suction point nozzle holder with limit switch	145	9.982-111.0						<input type="checkbox"/>

Available accessories.

IVR-L 100/40 SC 9.989-401.0



		Order no.	Quantity	ID	Length / width	Price	Description	
Suction point hose hanger with limit switch ø 60 mm	146	9.982-083.0					For mounting to pipelines with 60 mm diameter.	<input type="checkbox"/>
Suction point hose hanger with limit switch ø 75 mm	147	9.982-092.0					For mounting to pipelines with 75 mm diameter.	<input type="checkbox"/>
Suction point hose hanger with limit switch	148	9.982-093.0					For mounting to a wall. Incl. limit switch for vacuum cleaner control.	<input type="checkbox"/>
Suction point suction arm DN50 without hose	149	9.981-776.0		DN 50			Swivel arm DN 50 with wall mounting. Arm length: 2 m.	<input type="checkbox"/>
Suction point suction arm DN70 without hose	150	9.981-775.0		DN 70			Swivel arm DN 70 with wall mounting. Arm length: 2 m.	<input type="checkbox"/>
Suction point suction arm DN50 without hose	151	9.981-781.0		DN 50			Swivel arm DN 50 with floor support. Arm length: 2 m.	<input type="checkbox"/>
Suction point suction arm DN70 without hose	152	9.981-780.0		DN 70			Swivel arm DN 70 with floor support. Arm length: 2 m.	<input type="checkbox"/>
Suction point suction arm DN70	153	9.981-920.0		DN 70			Arm length: 2.5 m; Suction head with 150 mm diameter.	<input type="checkbox"/>
Suction point suction arm DN100	154	9.983-121.0		DN 100				<input type="checkbox"/>
Suction point PVC hose DN40 3m	155	9.989-701.0		DN 40			Light and flexible design. Suitable for dust, light solid materials and also lumpy materials. Temperature-resistant up to max. 85 °C.	<input type="checkbox"/>
Suction point PVC hose DN40 5m	156	9.989-702.0		DN 40				<input type="checkbox"/>
Suction point PVC hose DN50 3m	157	9.989-693.0		DN 50				<input type="checkbox"/>
Suction point PVC hose DN50 5m	158	9.989-694.0		DN 50				<input type="checkbox"/>
Suction point PVC hose DN70 3m	159	9.989-703.0		DN 70				<input type="checkbox"/>
Suction point PVC hose DN70 5m	160	9.989-704.0		DN 70				<input type="checkbox"/>
Suction point PU hose DN40 3m	161	9.989-705.0		DN 40			Robust, oil-resistant design. Suitable for abrasive suction media, liquids and dust. Temperature-resistant up to max. 80 °C.	<input type="checkbox"/>
Suction point PU hose DN40 5m	162	9.989-706.0		DN 40				<input type="checkbox"/>
Suction point PU hose DN50 3m	163	9.989-695.0		DN 50				<input type="checkbox"/>
Suction point PU hose DN50 5m	164	9.989-696.0		DN 50				<input type="checkbox"/>
Suction point PU hose DN70 3m	165	9.989-707.0		DN 70				<input type="checkbox"/>
Suction point PU hose DN70 5m	166	9.989-708.0		DN 70				<input type="checkbox"/>
Suction point ME-PU hose DN40 3m	167	9.989-697.0		DN 40			Very robust, electroconductive design. Suitable for highly abrasive suction media with liquids. Temperature-resistant up to max. 110 °C.	<input type="checkbox"/>
Suction point ME-PU hose DN40 5m	168	9.989-698.0		DN 40				<input type="checkbox"/>
Suction point ME-PU hose DN50 3m	169	9.989-699.0		DN 50				<input type="checkbox"/>
Suction point ME-PU hose DN50 5m	170	9.989-700.0		DN 50				<input type="checkbox"/>
Hose end piece, rotatable, female DN40	171	9.989-654.0		DN 50				<input type="checkbox"/>
Hose end piece, rotatable, female DN50	172	9.989-653.0		DN 50				<input type="checkbox"/>
Hose end piece, rotatable, female DN70	173	9.989-652.0		DN 70				<input type="checkbox"/>
Hose end piece, male DN40	174	9.981-142.0		DN 40				<input type="checkbox"/>
Hose end piece, male DN50	175	9.980-472.0		DN 50			Steel, wall thickness = 2 mm.	<input type="checkbox"/>

Available accessories.

IVR-L 100/40 SC

9.989-401.0



		Order no.	Quantity	ID	Length / width	Price	Description	
Hose end piece, male DN70	176	9.981-144.0		DN 70				<input type="checkbox"/>
Hose end connector, female, stainless steel DN 40	177	9.989-716.0		DN 40				<input type="checkbox"/>
Hose end connector, female, stainless steel DN 50	178	9.989-714.0		DN 50				<input type="checkbox"/>
Hose end connector, male, stainless steel DN 40	179	9.989-717.0		DN 40				<input type="checkbox"/>
Hose end connector, male, stainless steel DN 50	180	9.989-715.0		DN 50				<input type="checkbox"/>
Hose installation kit DN40 without end pieces	181	9.981-563.0		DN 40			Comprising 2 hose clamps and 2 hose sleeves.	<input type="checkbox"/>
Hose installation kit DN50 without end pieces	182	9.981-561.0		DN 50				<input type="checkbox"/>
Hose installation kit DN70 without end pieces	183	9.981-562.0		DN 70				<input type="checkbox"/>

Available accessories.